


Backlight

Quote@BYIBA.com
www.BYIBA.com

269-569-6700

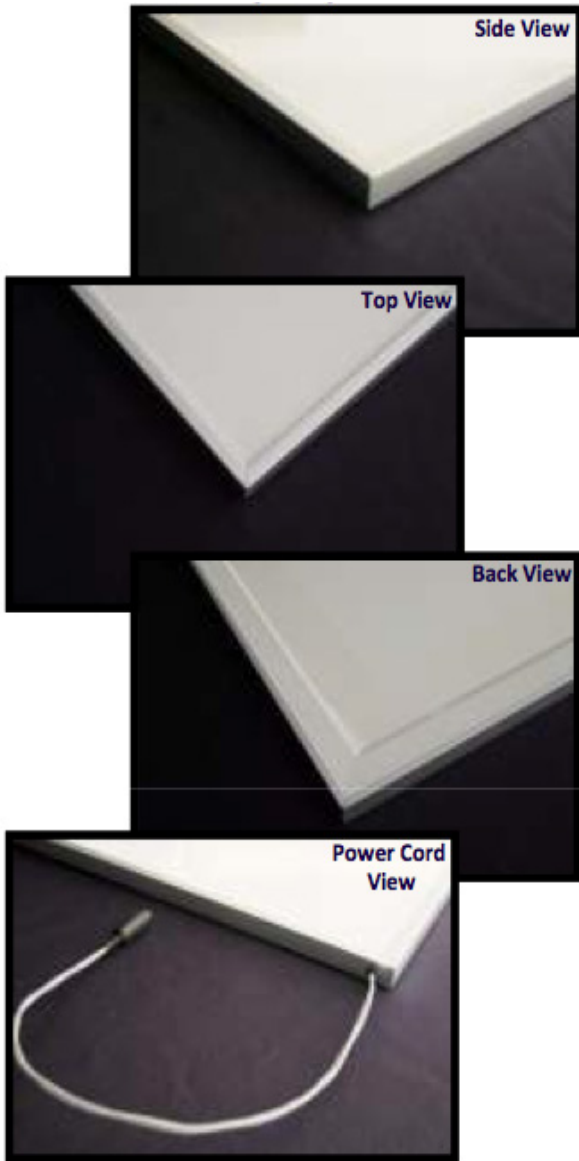

Dimension	Build to Order
Acrylic Thickness	1/4"
Custom Etching	Custom Pitch and Depth Patterning Across Acrylic - BYIBA Even Light System (c)
LED Intensity Options	<u>Standard</u> - 0.2W @ 1.00" spacing CRI 80/48 Lumens Per Watt <u>High</u> - 0.2W @ 0.50" spacing CRI 80/48 Lumens Per Watt <u>Super</u> - 0.50W @ 0.50" spacing CRI 80/55 Lumens Per Watt 24V LED System
LED Color Options	3200 K Warm / 5400 K Cool / Custom
Extrusion	Aircraft Grade Aluminum <u>Colors</u> Standard - White/Black/Clear Anodized Custom - Anodized Finishes/Full Powder Coat
Frame Profiles	Single Side
Backer	White Reflective Metal Backer White Reflective PVC Backer
Power Supplies	60W Power Adapter - UL Certified 100W Transformer Hard Wire - UL Certified
Installation Supports	Direct Wall Mount Direct Wall Z-Clamp System Aircraft Cable Hanging Systems Custom
Wattage	Watts -- Based on LED Length / Intensity

Dimensions:

A) Standard Profile Depth	0.500"
B) Frame Face	0.125"
C) Inner Frame Face	0.125"
D) Inside Dimension	0.420"

Applications:

Standard:	Indoor
Architectural Backlighting:	BYIBA Substrates: BYIBA Stone BYIBA Metal BYIBA Stetch Fabric BYIBA Plate Glass BYIBA Comerical Graphics
Retail Displays:	
Signage:	

