

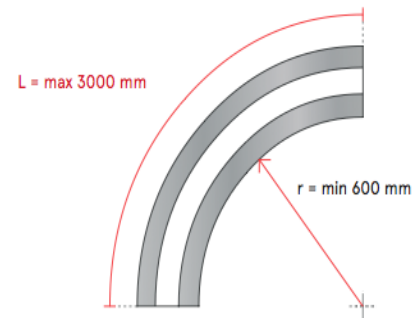

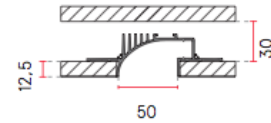
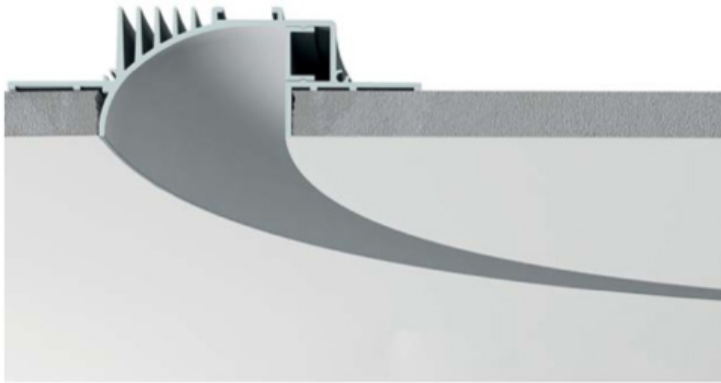



BYIBA




R71-P008
Curvo

Backlight



CODE			
P005B006.00. CT	39.37 in	2.08" x 39.57"	2.65 lbs

Accessories:

		
P001.KIT01 couple of endcaps	021.712 - 021.713 - 021.733 Strip LED	029.009.300 Opal Plastic Cover Replacement part

ALUMITE Profile
Screen in Opal Methacrylate
STRIP LED TO BE ORDERED SEPARATELY

BYIBA Backlight
991 S Gull Lake Dr
Richland, MI 49083 USA



g@gordonbullard.com
www.byiba.com
269-569-6700

BYIBA

Backlight

LED / DRIVERS
P001-P008



LED Options

Code	Electrical Part	Power	Lumen Output	CRI	Tension	LED/m	Color Temp
021.712	LED	30W/m	3000 lm/m	85	24V dc	140	3000 K
021.713	LED	20W/m	2000 lm/m	85	24V dc	140	3000 K
021.733	LED	14.5W/m	1300 lm/m	85	24V dc	120	3000 K

BYIBA Backlight
991 S Gull Lake Dr
Richland, MI 49083 USA



g@gordonbullard.com
www.byiba.com
269-569-6700

BYIBA

LED / DRIVERS P001-P008

Backlight

LED Options				Driver Code	026.155	026.175	026.153	026.188	026.189
				Power	19.2W	36W	60W	120W	240W
				Tension	24 V	24 V	24 V	24 V	24 V
021.712.50	50 cm	15W	1500 lm		1	1-2	1-4	4-8	8-16
021.712.100	100 cm	30W	3000 lm			1	1-2	2-4	4-8
021.712.150	150 cm	45W	4500 lm				1	1-2	3-5
021.712.200	200 cm	60W	6000 lm				1	1-2	2-4
021.712.300	300 cm	90W	9000 lm					1	1-2
021.713.50	50 cm	10W	1000 lm		1	1-3	1-6	6-12	12-24
021.713.100	100 cm	20W	2000 lm			1	1-3	3-6	6-12
021.713.150	150 cm	30W	3000 lm			1	1-2	2-4	4-8
021.713.200	200 cm	40W	4000 lm				1	2-3	3-6
021.713.300	300 cm	60W	6000 lm				1	1-2	2-4
021.733.50	50 cm	7.5W	650 lm		1-2	1-4	1-8	8-16	16-32
021.733.100	100 cm	14.5W	1300 lm		1	1-2	1-4	4-8	8-16
021.733.150	150 cm	22W	1950 lm			1	1-2	2-5	6-10
021.733.200	200 cm	29W	2600 lm			1	1-2	2-4	4-8
021.733.300	300 cm	43.5W	3900 lm				1	1-2	2-4

BYIBA Backlight
991 S Gull Lake Dr
Richland, MI 49083



g@gordonbullard.com
www.byiba.com
269-569-6700

BYIBA

LED / DRIVERS
P001-P008

Backlight

LED Options				DIMMER Code	021.219	026.209	026.190 021.188	026.190 026.189
				Power	21.6W	60W	120W	240W
				Tension	24 V	24 V	24 V	24 V
021.712.50	50 cm	15W	1500 lm		1	1-4	4-8	8-16
021.712.100	100 cm	30W	3000 lm			1-2	2-4	4-8
021.712.150	150 cm	45W	4500 lm			1	1-2	3-5
021.712.200	200 cm	60W	6000 lm			1	1-2	2-4
021.712.300	300 cm	90W	9000 lm				1	1-2
021.713.50	50 cm	10W	1000 lm		1-2	1-6	6-12	12-24
021.713.100	100 cm	20W	2000 lm		1	1-3	3-6	6-12
021.713.150	150 cm	30W	3000 lm			1-2	2-4	4-8
021.713.200	200 cm	40W	4000 lm			1	2-3	3-6
021.713.300	300 cm	60W	6000 lm			1	1-2	2-4
021.733.50	50 cm	7.5W	650 lm		1-2	1-8	8-16	16-32
021.733.100	100 cm	14.5W	1300 lm		1	1-4	4-8	8-16
021.733.150	150 cm	22W	1950 lm			1-2	2-5	6-10
021.733.200	200 cm	29W	2600 lm			1-2	2-4	4-8
021.733.300	300 cm	43.5W	3900 lm			1	1-2	2-4

BYIBA Backlight
991 S Gull Lake Dr
Richland, MI 49083



g@gordonbullard.com
www.byiba.com
269-569-6700

BYIBA

R71
Recessed Linear
Order Sheet

Backlight

EXAMPLE: R71.P002B006.00.CT = Extrusion
R71.021.712.50 =LED/Length
R71.026.155 =Driver
R71.026.219 =Dimmer (optional)

Extrusion Part Number -

P001
P002
P003
P004
P005

Strip LED Part Number and Length -

021.712.XX
021.713.XX
021.733.XX

50cm (.50), 100cm (.100), 150cm (.150), 200cm (.200), 300cm (.300)

Driver Part Number -

026.155
026.175
026.153
026.188
026.189

Dimmer Part Number (optional) -

026.219
026.209
026.190 / 026.188
026.190 / 026.189

Trim or Trimless -

.37 Trim
.38 Trimless

BYIBA Backlight
991 S Gull Lake Dr
Richland, MI 49083 USA



g@gordonbullard.com
www.byiba.com
269-569-6700